


●Output Signal

There are 6 kinds of output signals: “rotating” , “rotating direction” , “rotating pulse” , “rotating speed achieved” , “warning” , and “error” . These signals are pulsed transistor activation signals. Voltage and Current Specifications

Applied Voltage (V_{max}) $\leq 30VDC$

Working Current (I_p) $\leq 100mA$ (Rotational Pulse 50mA)

Use an external power source for output circuits. It is recommended to use the same 24VDC power source used for input signals. Please refer to **Fig. 27** for connections.

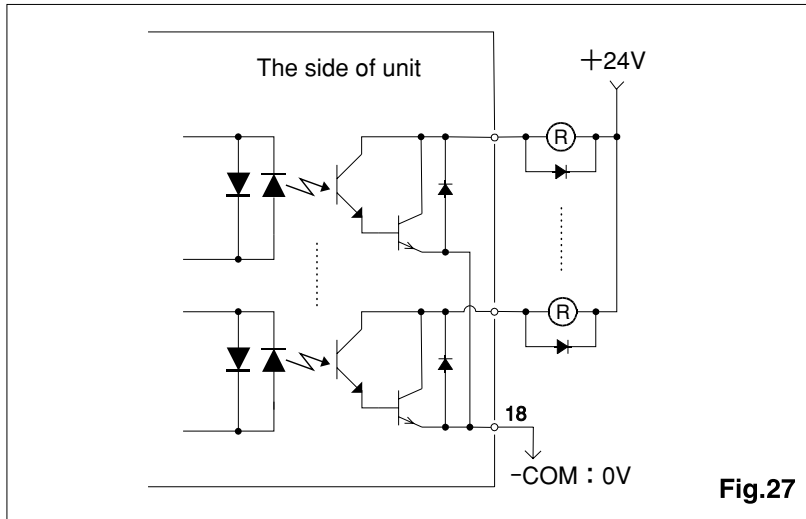

●Motor Speed Control Signal(Motor #1 & #2)

Refer to **Fig.28** for connections

